


SBS-XX-CW-40 CONTROL PANEL

FOR SURFACE SNOW MELTING SYSTEMS

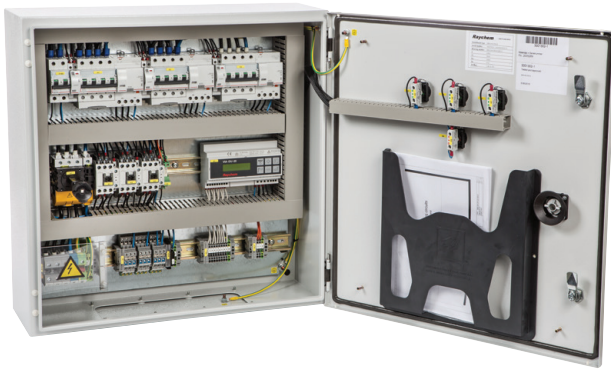

DESCRIPTION

The nVent RAYCHEM SBS-XX-CW-40 control panel for ice and snow prevention systems provides a totally integrated electrical safety, connection and control solution for RAYCHEM EM4-CW constant wattage heating cables for surface snow melting applications. The control panel comprises the VIA-DU-20 multi-sensor control unit for energy efficient ground surface heating, and integrated electrical safety devices. The SBS-xx-CW-40 panels offer solutions up to 18 maximum circuits of EM4-CW cables. The panel also includes electrical circuit protection devices (C-type circuit breakers) and residual current devices for safety and peace of mind. The panels need only be connected to the 400Vac (3 phase) supply.

ADVANTAGES

Fast connection of multiple circuits directly into the control panel

- No need for additional connections terminals
 - 3-18 maximum circuit lengths can be connected and switched by a single panel
 - Circuit protection and safety devices integrated into the panel
- No need for separate safety devices
 - Complete system from the manufacturer
- System and components specifically selected for high performance ice and snow prevention system control

TECHNICAL DATA

| | |
|-----------------------------|--|
| Control | VIA-DU-20 multi-sensor control unit |
| Power | 400Vac |
| Set temp. | Variable |
| Sensor | Ground temperature, moisture, and ambient temperature sensors |
| Approval | CE (Approved to IEC61439) |
| Supply | Dependent on selected panel (32A-200A) |
| RCD | 30mA |
| Line Circuit breakers | 20A (Type C) per 3 heater circuit group |
| Installation location | Indoor |
| Ambient temperatures | +10°C to +35°C |
| Enclosure protection rating | IP65 |
| Colour | RAL 7035 (Grey) |
| Enclosure type and material | Hoffman Branded (nVent), Metal Enclosure |
| Selector Switch | Auto/Manual heating circuit mode |
| Alarm function | 1 general potential free alarm contact; alarm light indicator on panel front |

SBS CONTROL PANEL WEIGHT & DIMENSIONS TABLE

| Product | Weight (kg) | Length (mm) | Width (mm) | Depth (mm) |
|--------------|-------------|-------------|------------|------------|
| SBS-03-CW-40 | 32 | 600 | 400 | 210 |
| SBS-06-CW-40 | 45 | 600 | 600 | 210 |
| SBS-09-CW-40 | 90 | 800 | 800 | 210 |
| SBS-12-CW-40 | 90 | 800 | 800 | 210 |
| SBS-15-CW-40 | 115 | 1000 | 800 | 300 |
| SBS-18-CW-40 | 115 | 1000 | 800 | 300 |

NVENT RAYCHEM RELATED PRODUCTS

The SBS-xx-CW-40 control panel is compatible with the RAYCHEM EM4-CW heating cables:

RAYCHEM EM4-CW heating cable (25W/M)

GM-2XT (for drain line heating)*

* The SBS-XX-CW-40 panel includes an additional circuit connection for drain heating capabilities at the edge of heated surfaces or at the lower end of ramps using GM-2XT heating cable (maximum drain line circuit length of 15m)

PRODUCT REFERENCE

To order the SBS-xx-CW-40 control panel, please reference:

| Product name | Order reference | Description |
|--------------|-----------------|---|
| 1244-006434 | SBS-03-CW-40 | Up to 3 Circuit control panel for EM4-CW surface heating products |
| 1244-006435 | SBS-06-CW-40 | 4-6 Circuit control panel for EM4-CW surface heating products |
| 1244-006436 | SBS-09-CW-40 | 7-9 Circuit control panel for EM4-CW surface heating products |
| 1244-006437 | SBS-12-CW-40 | 10-12 Circuit control panel for EM4-CW surface heating products |
| 1244-006438 | SBS-15-CW-40 | 13-15 Circuit control panel for EM4-CW surface heating products |
| 1244-006439 | SBS-18-CW-40 | 16-18 Circuit control panel for EM4-CW surface heating products |

INSTALLATION INFORMATION

Complete panel wiring information and schematics are provided with the product. All electrical installations must be carried out by an approved electrician in compliance with local electrical requirements and norms.

United Kingdom

Tel 0800 969 013
Fax 0800 968 624
salesthermalUK@nvent.com

Ireland

Tel 1800 654 241
Fax 1800 654 240
salesIE@nvent.com

South East Asia

Tel +65 67685800
Fax +65 67322263

Australia

Tel +61 2 97920250
Fax +61 2 97745931

India - Noida

Tel +91 120 464 9500
Fax +91 120 464 9548
NTMinfome@nvent.com

India - Mumbai

Tel +91 22 6775 8800/01
Fax +91 22 2556 1491
NTMinfome@nvent.com

UAE

Tel +971 4 378 1700
Fax +971 4 378 1777
NTMinfome@nvent.com



nVent.com

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER